



Data sheet 150B47.5L-56

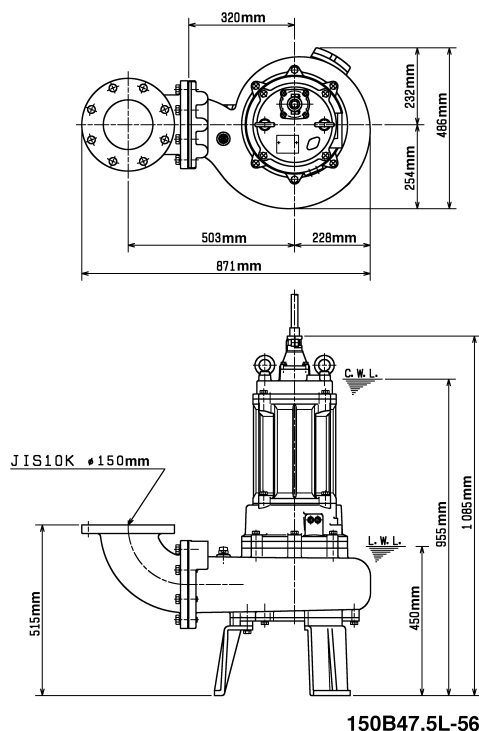

CWL: Continuous running water level
LWL: Lowest running water level

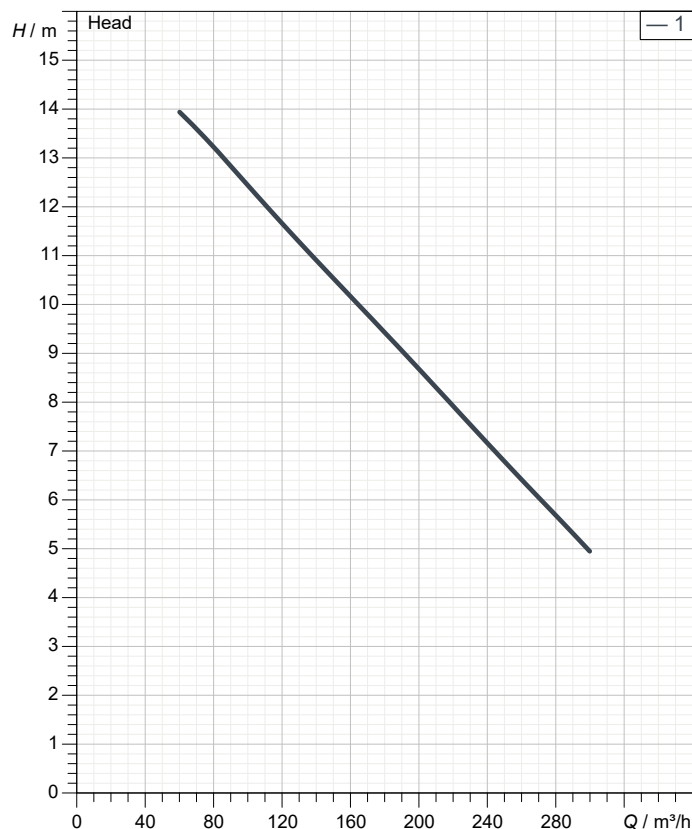

Specification

Electric submersible pump B-series
Degree of protection IP 68
Pressure resistance max. 15 m
Type of impeller dual channel impeller
Free passage 60 mm
Suitable for:
sewage water

Electric motor

Dry-type submersible induction motor
Insulation class F 4Poles 1445 1/min
Starting mode Direct starting
Rated voltage 400 V 50 Hz 3~
Power uptake 9.16 kW
Rated power 7.50 kW
Rated current 15.9 A
Start current 89.0 A

Cable

10m NSSHÖU 4Cx4mm²

Motor Protection

Circle thermal protector
(snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath
additional lubrication by oil lifting device

Primary seal

Silicon carbide on silicon carbide

Secondary seal

Silicon carbide on silicon carbide

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller	FC200 (EN-GJL-200)
Pump casing	FC200 (EN-GJL-200)
Suction cover	FC200 (EN-GJL-200)
Motor Frame	FC200 (EN-GJL-200)
Shaft	DIN 1.4000 (EN-X6Cr13)

Discharge size

150mm JIS10K flange
guide rail fitting optional


Weight

200 kg (dry weight of the pump only without cable)

Performance curve



150B47.5L-56

Discharge port	6"
Head	13.9 m
Flow	299.9 m³/h
Rated power	7.50 kW
Power input	9.16 kW
Phases	3~
Voltages	400 V
Frequency	50 Hz
Rated current	15.9 A
Starting current	89.04 A
Number of poles	4
Speed	1445 1/min
Starting mode	Direct starting
Insulation class	F

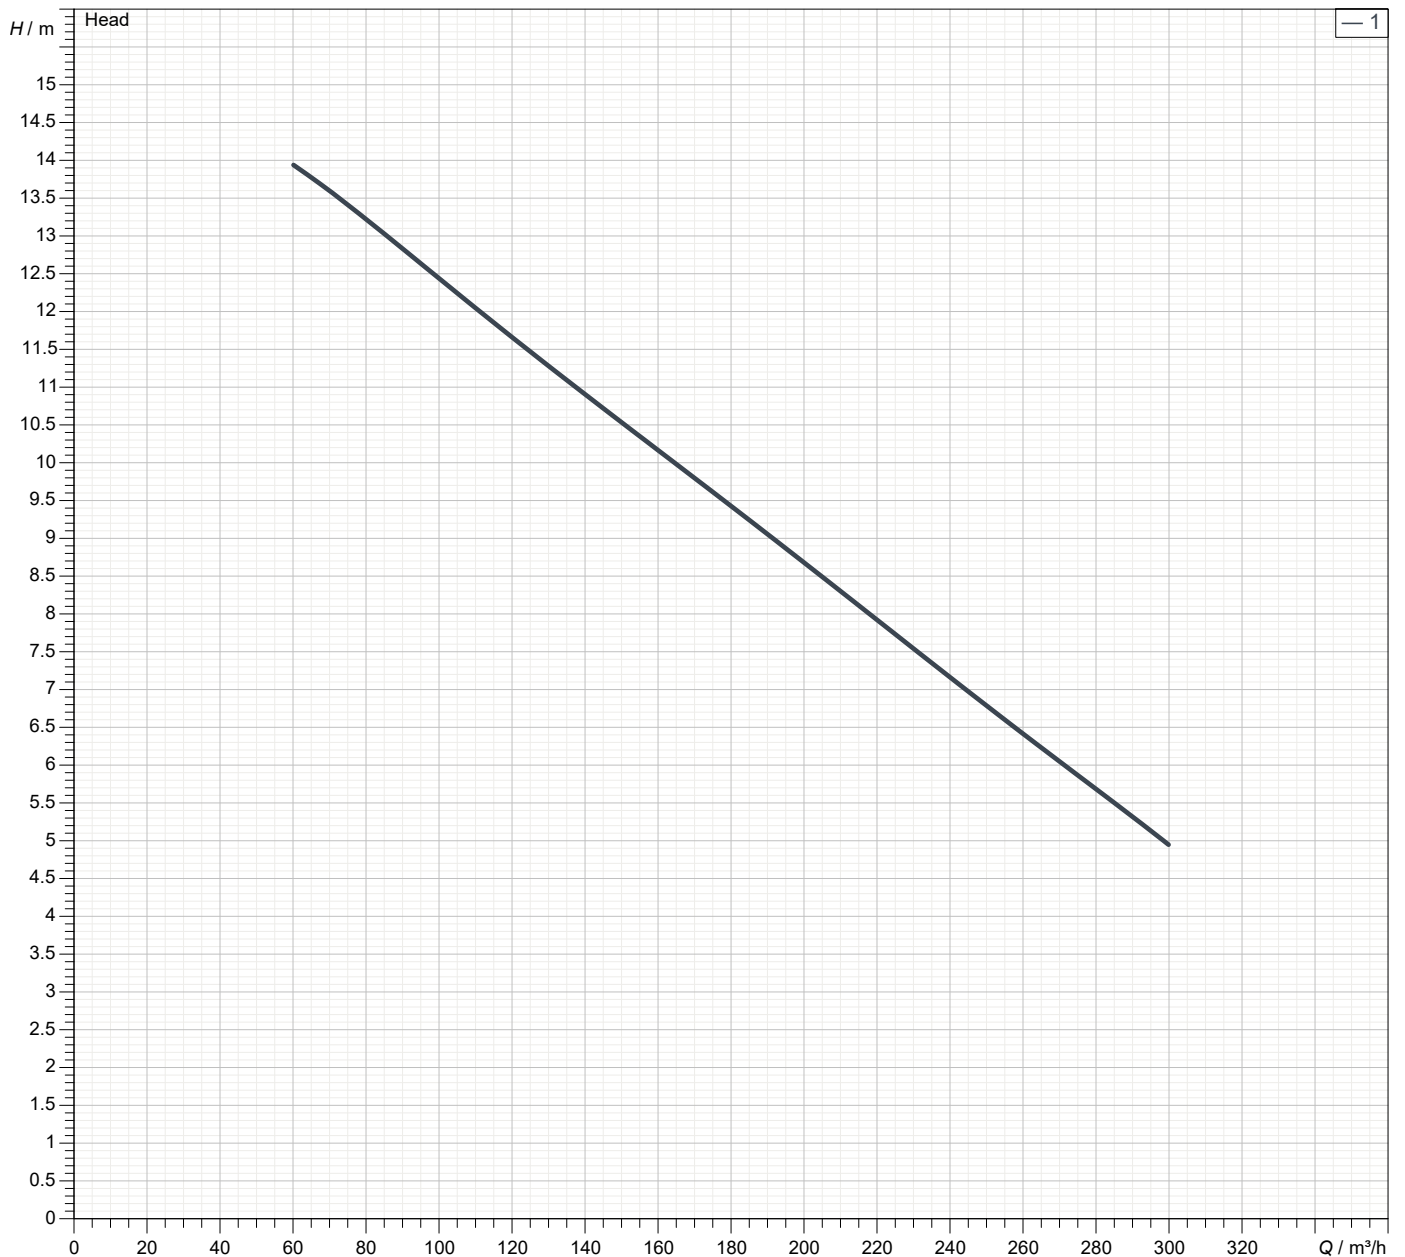

Dimensions

150B47.5L-56

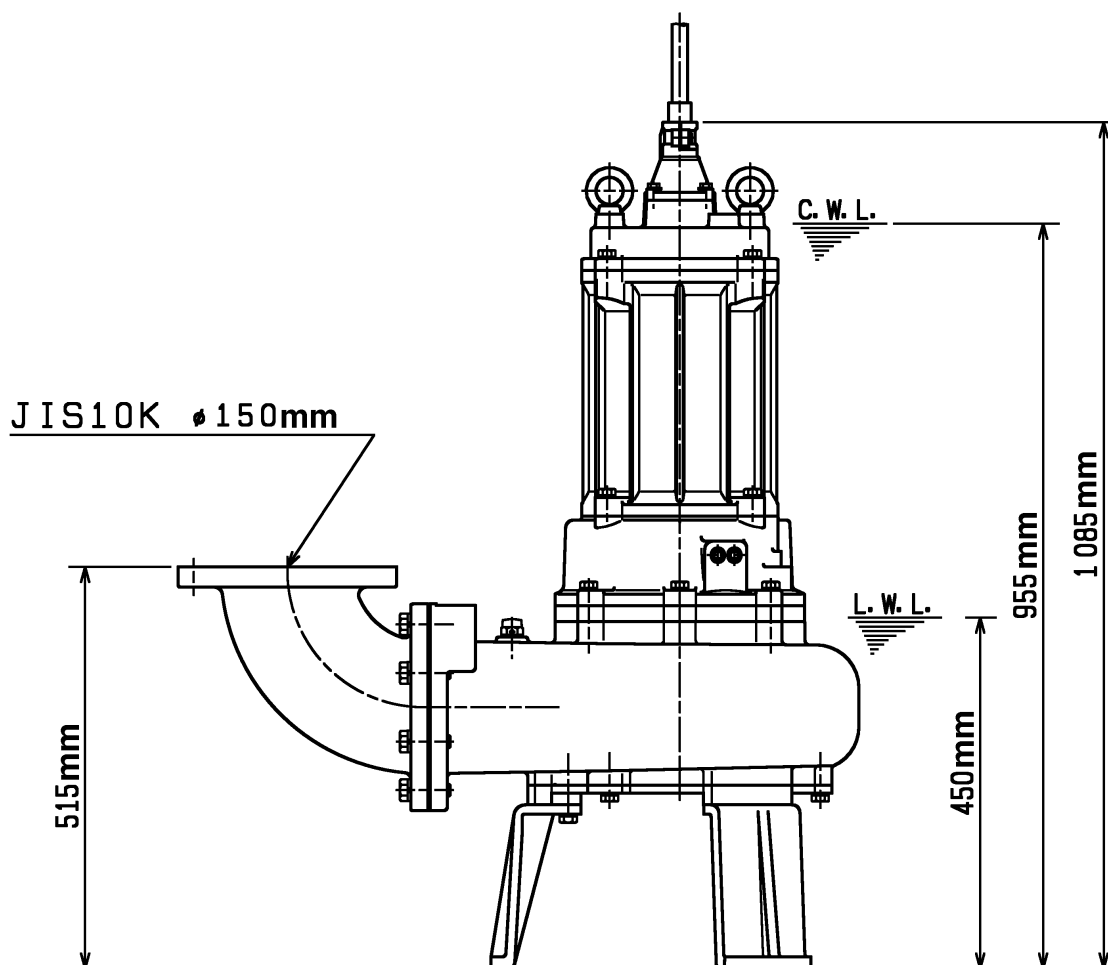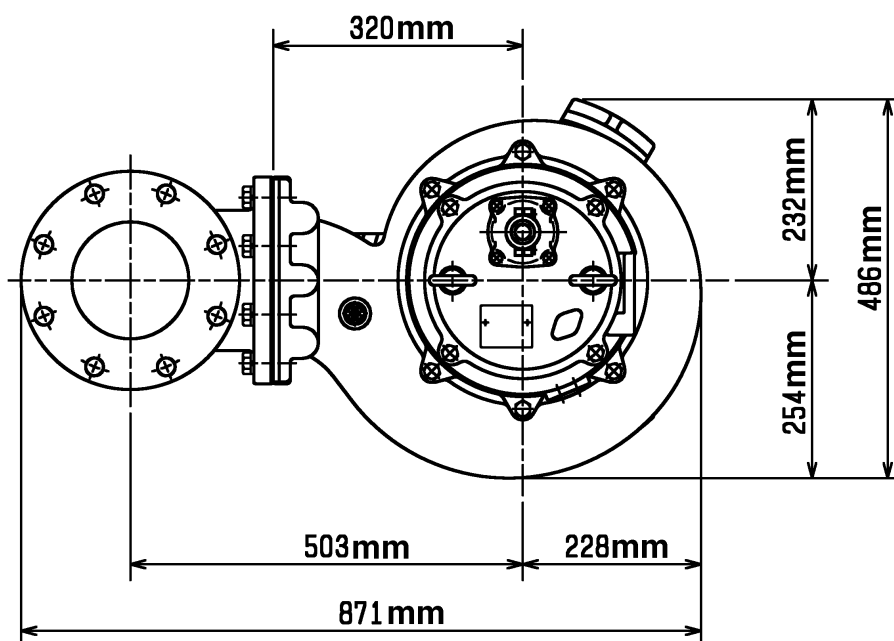

150B47.5L-56

CWL: Continuous running water level
LWL: Lowest running water level

TSURUMI PUMP

Tsurumi (Europe) GmbH

2025-03-03

V.01.02.2025

Wahlerstr. 10 * 40472 Düsseldorf * Germany

Tel.: +49-211-4179373


Fax: +49-211-417937-480

sales@tsurumi.eu

www.tsurumi.eu

Sectional drawing

150B47.5L-56

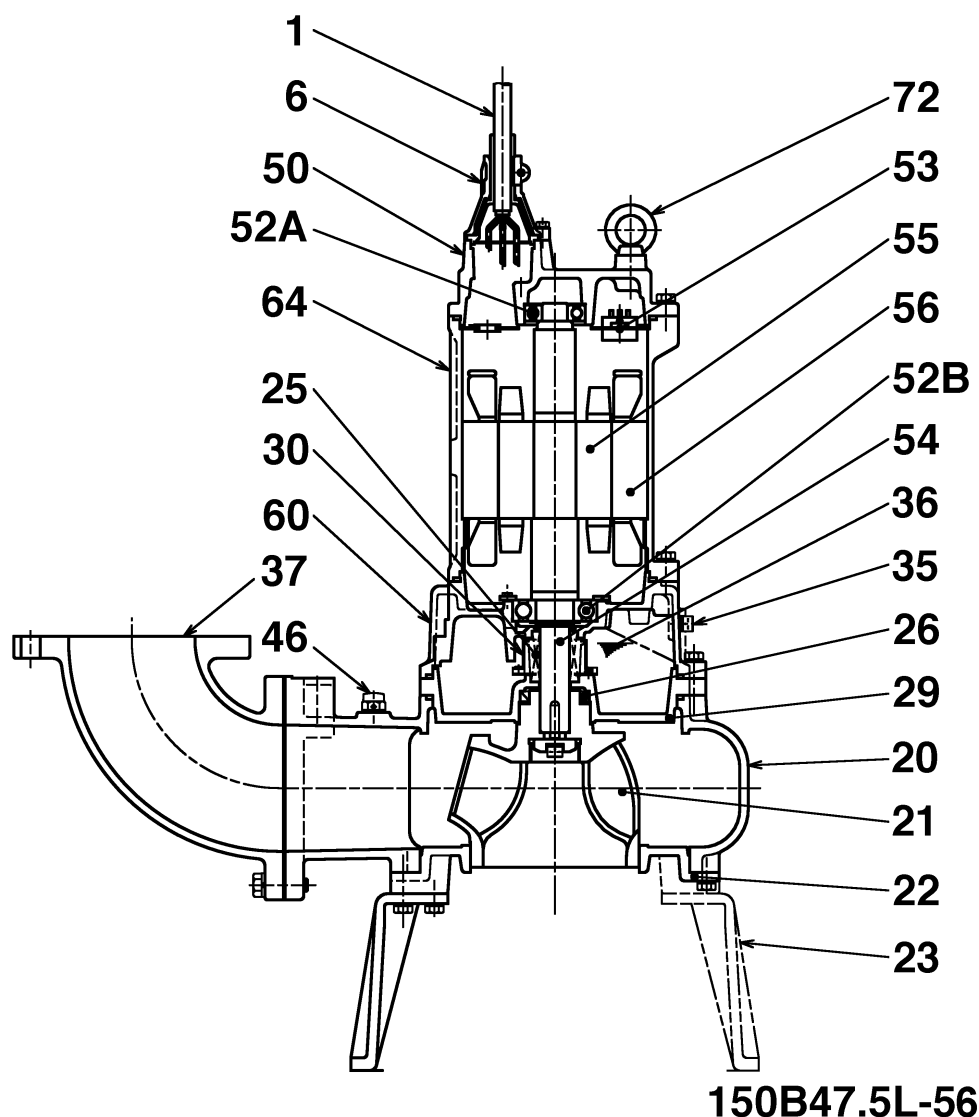

No.	Description	Remark	No.	Description	Remark
1	Cable	NSSHÖU	52B	Lower bearing	6309ZZC3
6	Cable entry	FC200 (EN-GJL-200)	53	Motor Protector 380/400/415V-50Hz	KA314-HRXL00 (H.C)
20	Pump casing	FC200 (EN-GJL-200)	54	Shaft	DIN 1.4000 (EN-X6Cr13)
21	Impeller	FC200 (EN-GJL-200)	55	Rotor	.
22	Suction cover	FC200 (EN-GJL-200)	56	Stator	.
23	Stand (3x)	FCD45 (EN-GJS-450-10)	60	Bearings	FC200 (EN-GJL-200)
25	Mechanical seal	H-35A	64	Motor Frame	FC200 (EN-GJL-200)
26	Oil seal	TC608212	72	Eye screw (2x)	Construction steel SS400
29	Oil casing	FC200 (EN-GJL-200)			
30	Oil distributor	Plastic			
35	Oil screw (2x)	DIN 1.4301 (EN-X5CrNi 18-10)			
36	Lubricant	Turbine oil (ISO VG32)			
37	Discharge bend	FC200 (EN-GJL-200)			
46	Air vent valve	Nylon			
50	Motor cover	FC200 (EN-GJL-200)			
52A	Upper bearing	6306ZZC3			