



Data sheet 50TM2.4S-53

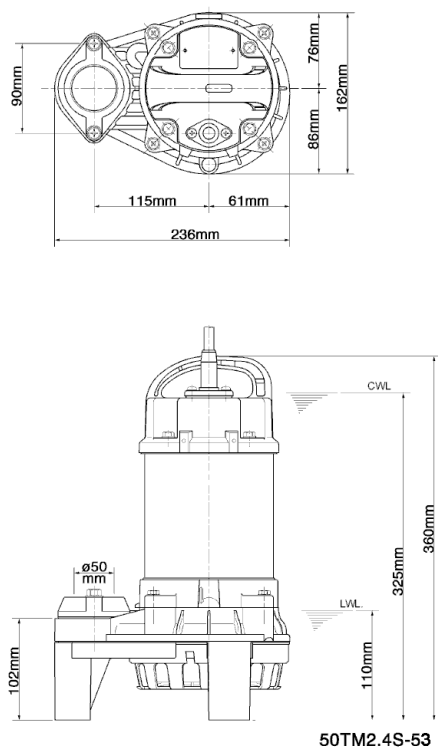

CWL: Continuous running water level
LWL: Lowest running water level

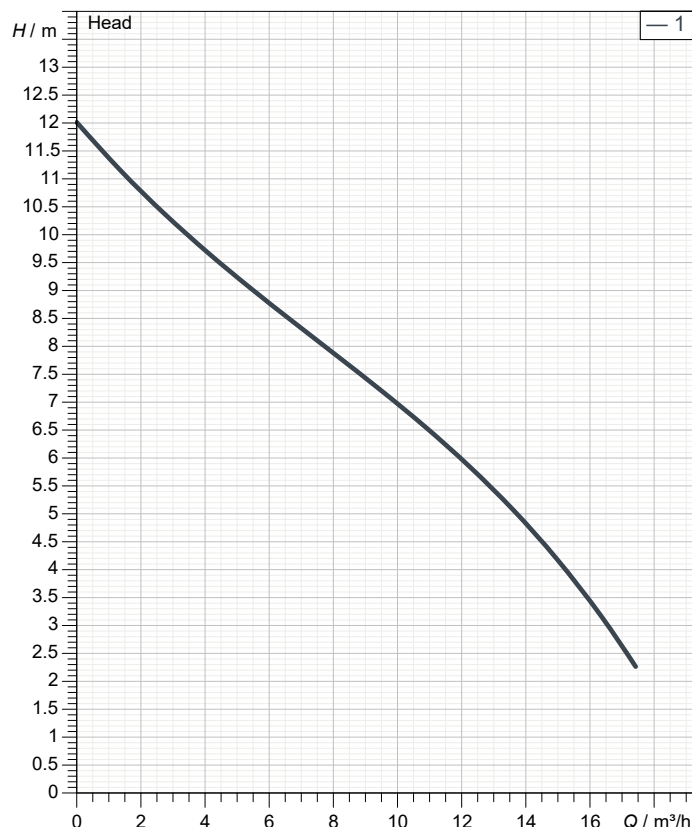

Specification

Electric submersible pump TM-series
Degree of protection IP 68
Pressure resistance max. 10 m
Type of impeller Vortex impeller
Free passage 10 mm
Suitable for:
sea water, salt water

Electric motor

Dry-type submersible induction motor
Insulation class E 2Poles 2813 1/min
Starting mode
Rated voltage 230 V 50 Hz 1~
Power uptake 0.62 kW
Rated power 0.40 kW
Rated current 3.1 A
Start current 8.7 A

Cable

10m H07RN8-F 3Cx1mm²

Motor Protection

Circle thermal protector
(snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath
additional lubrication by oil lifting device
Primary seal
Silicon carbide on ceramic
Secondary seal
Ceramic on carbon

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller	PPO-GF20
Pump casing	ABS-GF20
Motor Frame	Titanium
Shaft	Titanium

Discharge size

50mm screwed-in mating flange

Weight

6.7 kg (dry weight of the pump only without cable)

Performance curve



50TM2.4S-53

Discharge port	2"
Head	12.0 m
Flow	17.4 m³/h
Rated power	0.40 kW
Power input	0.62 kW
Phases	1~
Voltages	230 V
Frequency	50 Hz
Rated current	3.1 A
Starting current	8.71 A
Number of poles	2
Speed	2813 1/min
Starting mode	
Insulation class	E



Dimensions

50TM2.4S-53

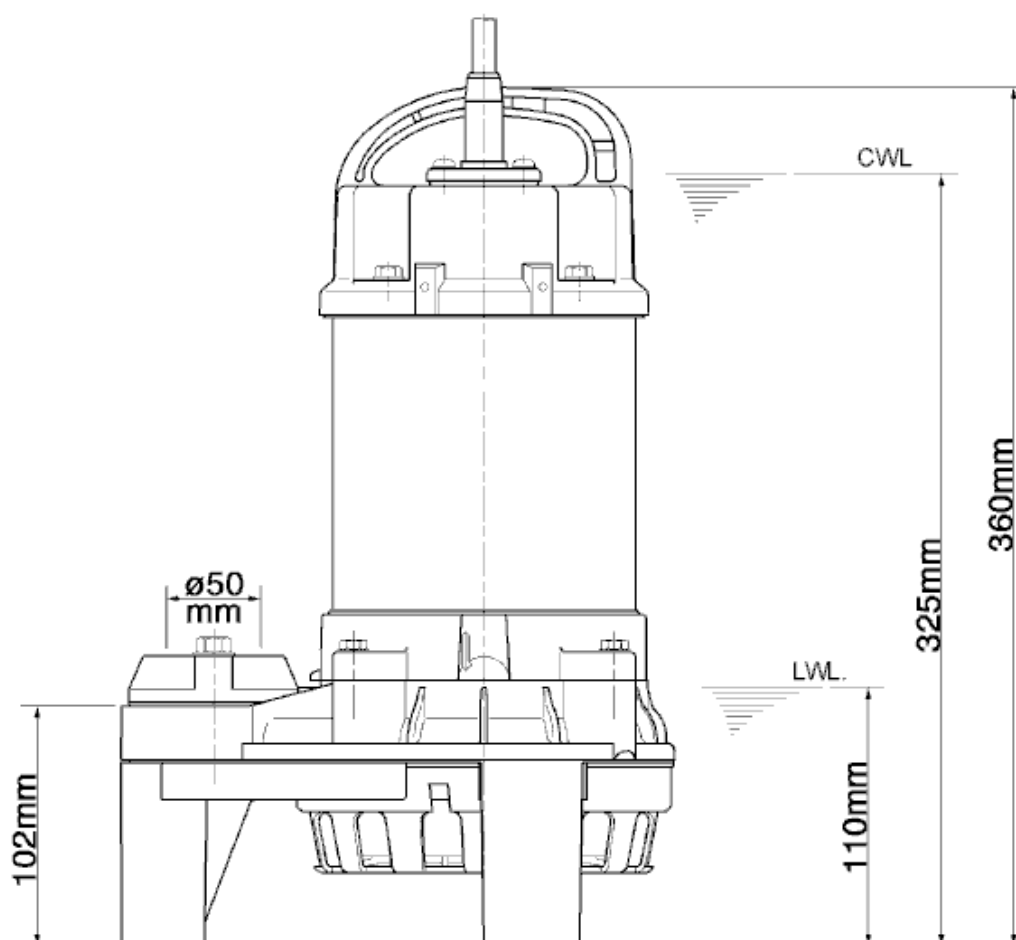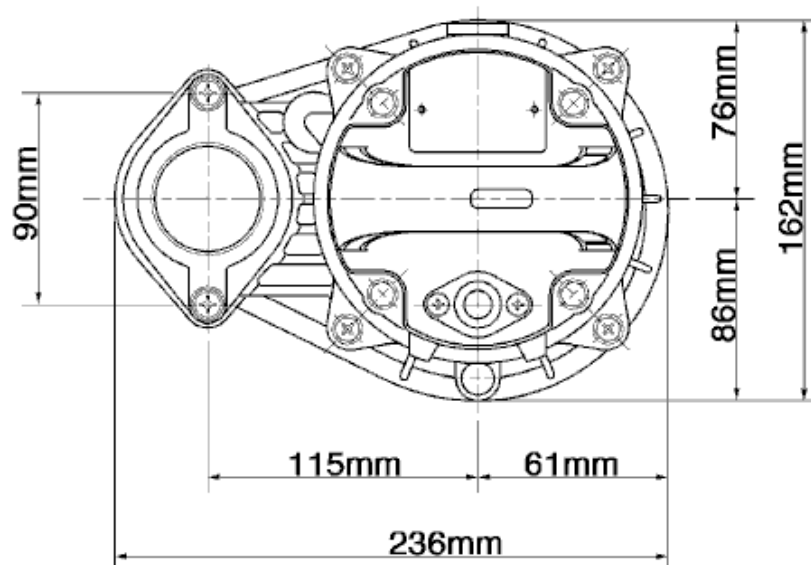


50TM2.4S-53

CWL: Continuous running water level
LWL: Lowest running water level

Sectional drawing

50TM2.4S-53

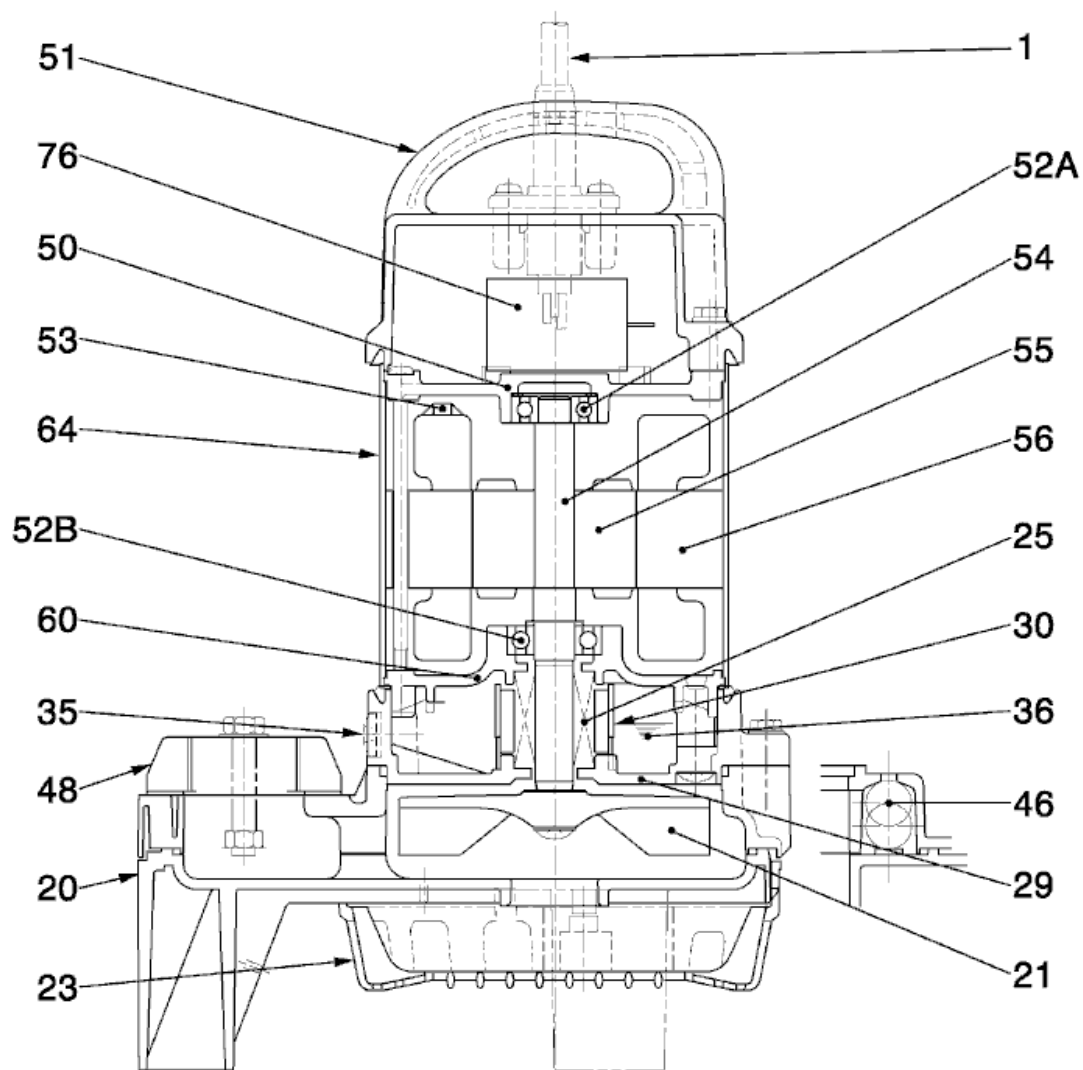

50TM2.4S-53

No.	Description	Remark	No.	Description	Remark
1	Cable	H07RN8-F	54	Shaft	Titanium
20	Pump casing	ABS-GF20	55	Rotor	.
21	Impeller	PPO-GF20	56	Stator	.
23	Strainer	ABS	60	Bearing Housing	ADC12 Aluminium die casting
25	Mechanical seal	W-14HL	64	Motor Frame	Titanium
29	Oil casing	PPS-GF40	76	Condenser	.
30	Oil distributor	Plastic			
35	Oil screw	Titanium			
36	Lubricant	white oil (ISO VG32)			
46	Air vent valve	Glass bead			
48	Screwed Flange	Polycarbonate			
50	Motor cover	ADC12 Aluminium die casting			
51	Main cover	PPO+PPS -GF40			
52A	Upper bearing	6201ZZC3			
52B	Lower bearing	6302ZZC3			
53	Motor Protector 380/400/415V-50Hz	KA314-HRXL00 (H.C)			